

General		
Shape	Oval	
Seating Capacity	n/a	
Shell Material	DuraTex™	
Dimensions	90¼" x 228" x 62" H / (229cm X 579cm x 157cm H)	
Corner Radii	N/A	
Water Capacity	2400 Gallons (9085 Liters)	
Dry Weight	3700 lbs (1680 kg)	
Shipping Weight	3700 lbs (1680 kg)	
Full Weight	23700 lbs (10800 kg)	
Skirt Material	Wood or Synthetic optional	
Water System		
Water Treatment System	Optional UltraPure*	
Plumbing Systems	2 plus water management option	
Filters/Coverage	2/75 sq. ft. or (1/75 sq. ft. & 1/170 sq. ft. option)	
Gate Valves	2 per pump + 2 per lower control	
Jet - Mini Rotator	4	
Jet - Mini Directional	8	
Swim Jets	4 Standard (6 optional)	
Ozone Jet	1 *	
Heater Return Jet	0	
Pump Returns	5	
Diverter Valves	1	
Floor Drains	1	
Skimmer	2 - 8" Weir	
Special Features		
NeckFlex® Jet Pillows	1	
Headrest Pillows	0	
Optimounts™	14	
Tether Mount	2	
Swim Bar	1	
Swim Jet Air Valves	2	
Swim Tether	1	
Stereo	Optional	
Pump Information		
	Domestic (60Hz)	Export (50Hz)
Motor Size – Peak (Continuous) HP	5.0 (3.0) HP	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	1/Dual & 1/Single or 1/Dual & 2/single Option	1/Dual & 1/Single or 1/Dual & 2/single option
Circulation pump	1 with UltraPure option	1 with UltraPure option
Electrical System		
	Domestic (60Hz)	Export (50Hz)
Voltage	240	230
Amperage	50 / 40	1x32 / 3x16 / 2x16
Heater	5.5 kW *	5.2 kW *
Thermostat	Electronic *	Electronic *
Light	2 Multi color LED**	2 Multi color LED**
Control System	Gecko Alliance *	Gecko Alliance *
Upper Control	Gecko Alliance *	Gecko Alliance *




Note: 1. Subject to change without notice.

2. * For builder's pack models the following equipment is not supplied.

Ozone Jets, water treatment system, heater, thermostat, upper control, control system and pumps.

3. ** Builder's pack light is an incandescent bulb.

AquaPro 19' Architectural Specification

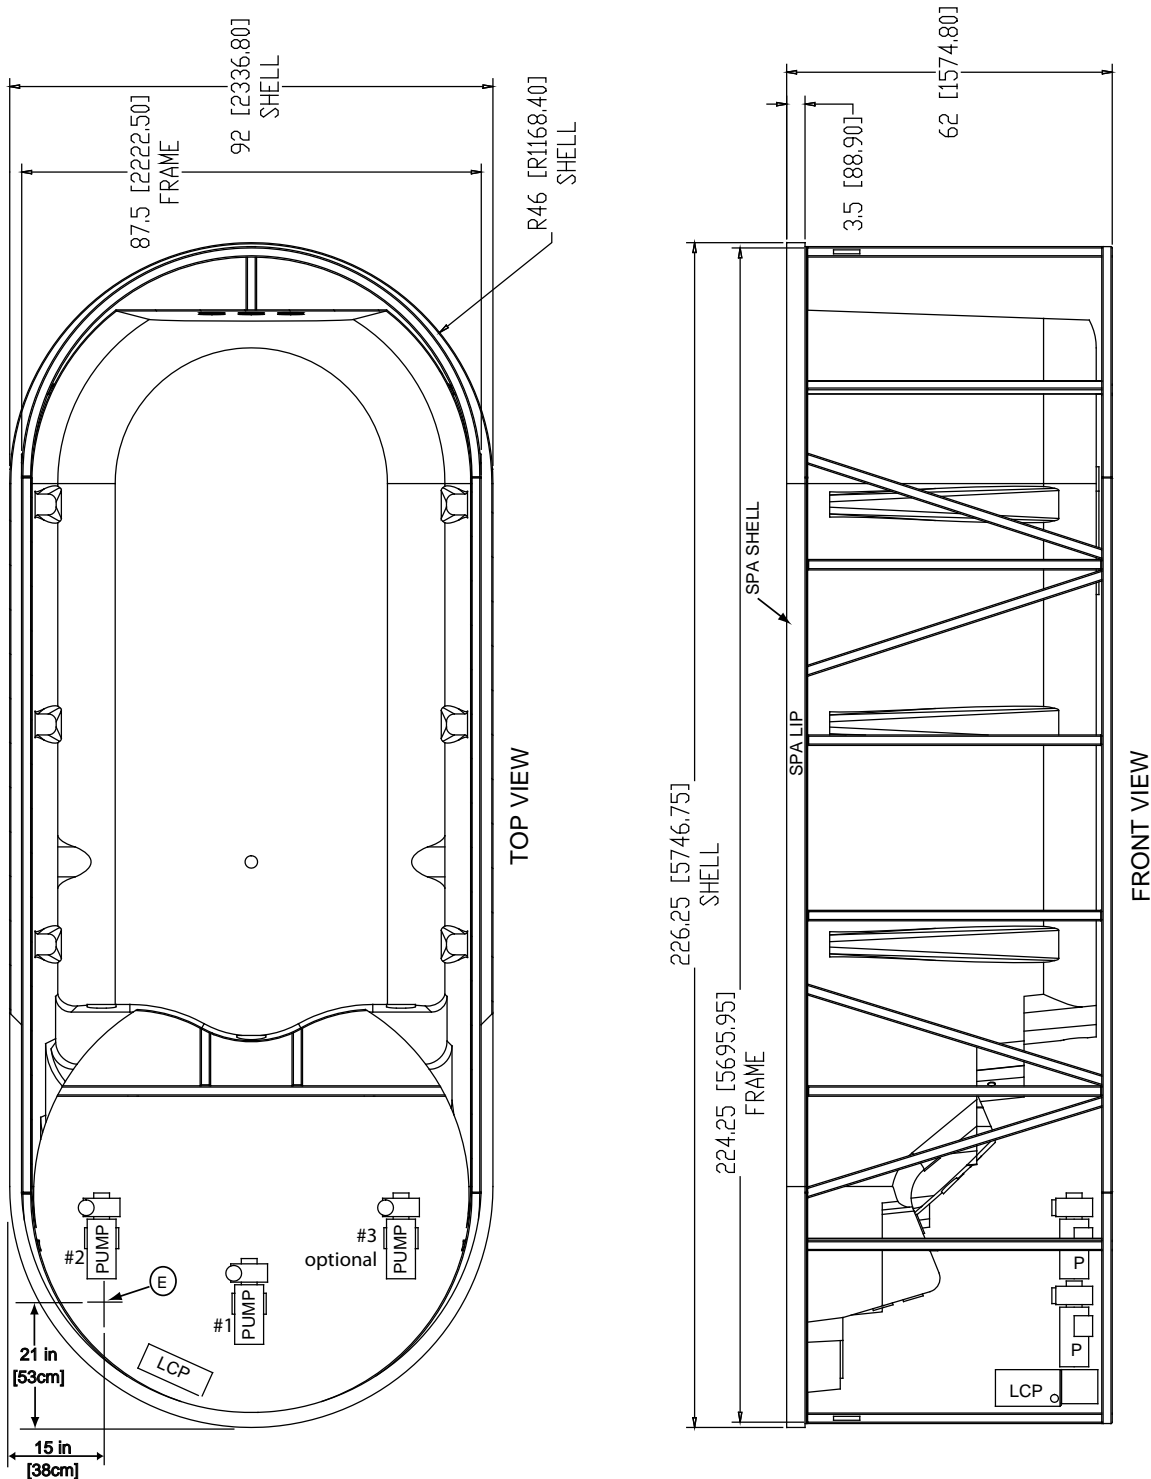


**AFS MUST BE FULLY SUPPORTED OVER THE ENTIRE BASE.
REFER TO D1 DOC-138 FOR INSTALLATION DETAILS.**

- Note:**
1. Subject to change without notice.
 2. Engineering specs may differ slightly from brochure.
 3. Optional cabinets may add significant weight. Ask your dealer for exact details.
 4. Pumps and control panels are not supplied with builder's pack.

Caution:
Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.

- Legend**
- Pump - P
 - Electrical - E
 - Lower Control Panel - LCP
 - Upper Control Panel - UCP

AquaPro 19' Plumbing Configuration

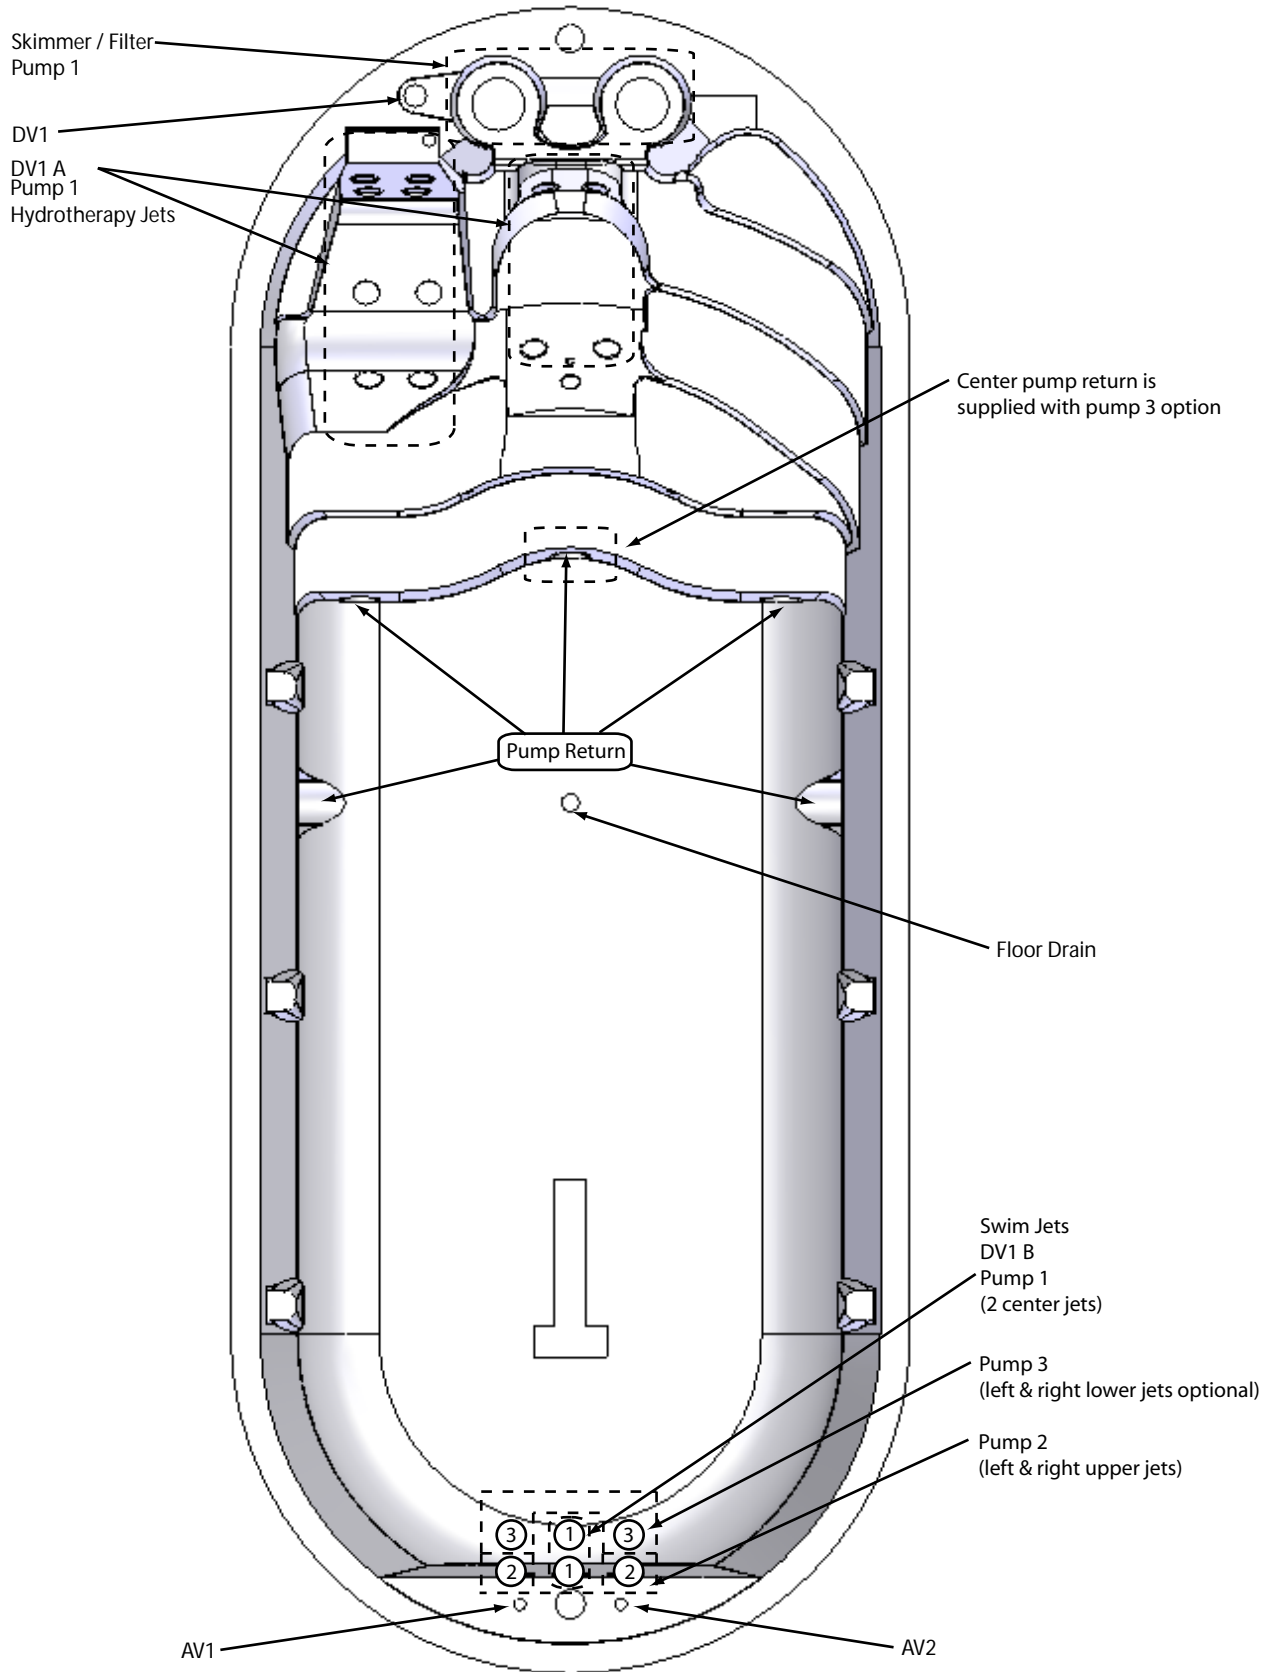

Note: 1. Subject to change without notice.

DV1 A = Diverter Valve 1 (A position Clockwise)

DV1 B = Diverter Valve 1 (B position Counter Clockwise)


DV1 C = Diverter Valve 1 (Neutral position)

AV1 = Air Valve 1, control top swim jets (Clockwise minimum flow, Counter Clockwise maximum flow).

AV2 = Air Valve 2, control bottom swim jets (Clockwise minimum flow, Counter Clockwise maximum flow).

All Drains in common loop with pump 1, 2 and 3.

AquaPro 19' Jet Insert Designations

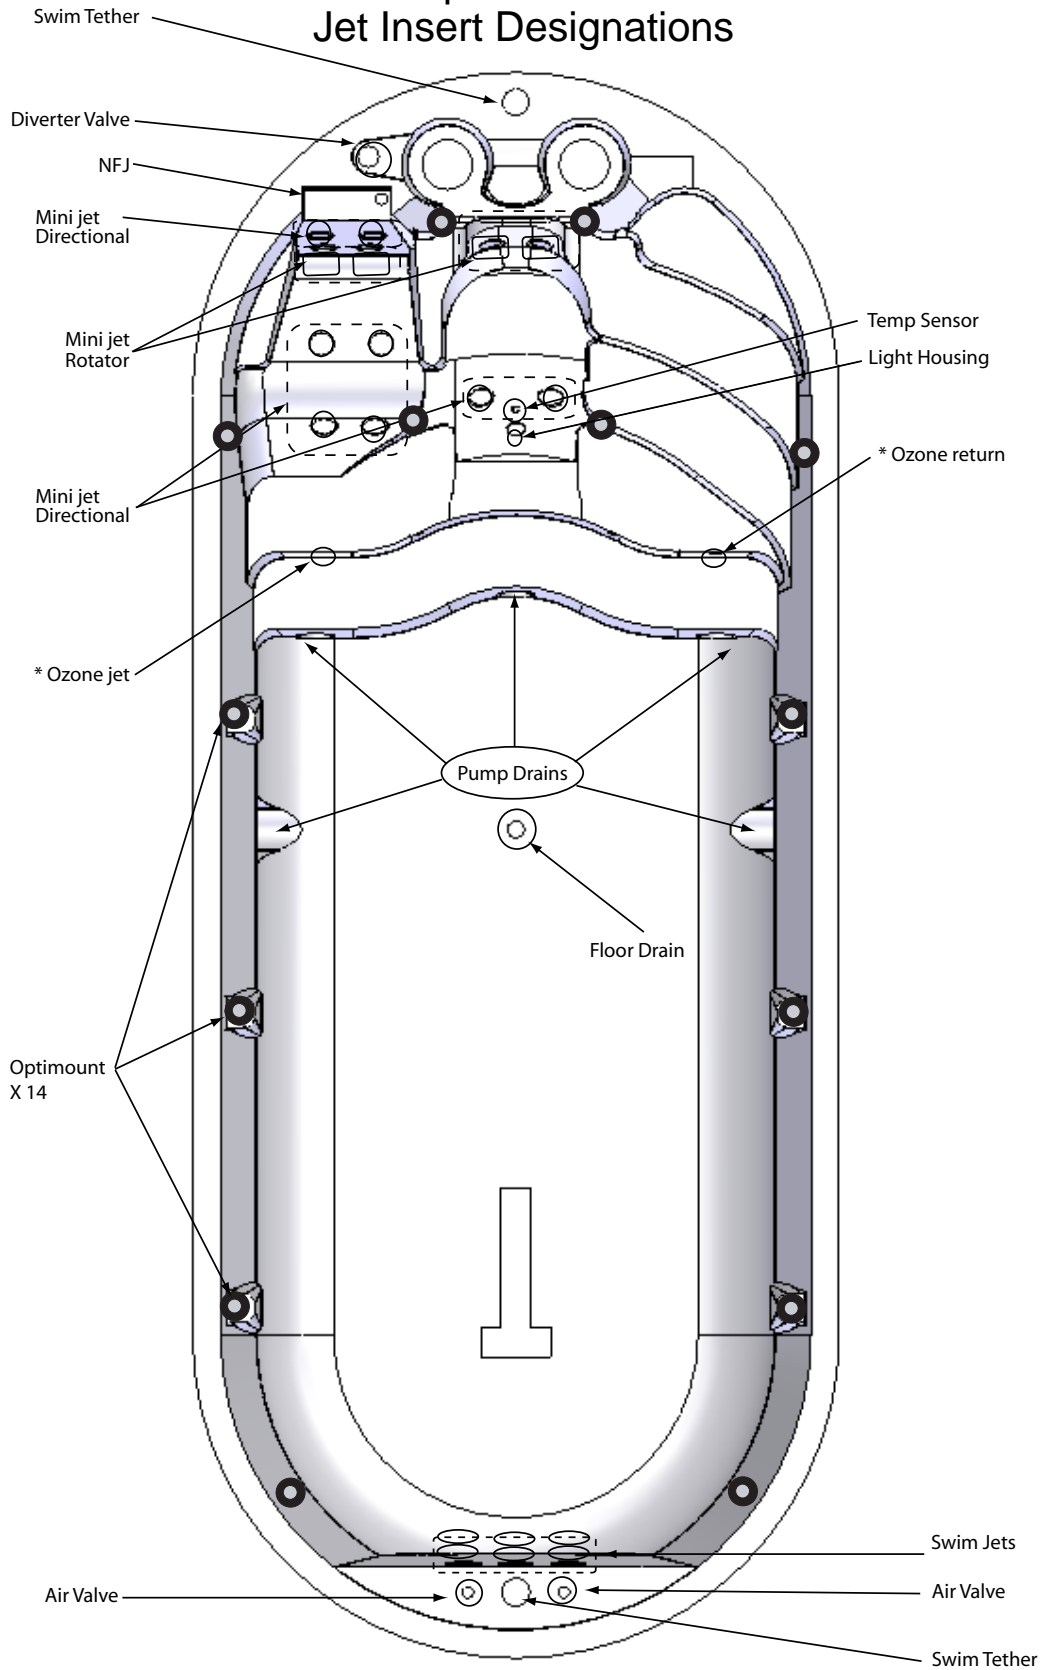

Note: 1. Subject to change without notice.

2. * Some equipment shown is not supplied with builder's pack.